

# Grain Augers

- Improve your productivity
- Save money



**Quality agricultural products  
Designed and made in Australia**

**Mobile augers to manage all your grain handling needs  
Delivered fully assembled and ready to work**

Bosmac manufactures augers suitable for a range of grain handling applications. With a reputation for producing high quality, reliable and durable agricultural equipment, Bosmac are your local auger specialists.

## Features

- Efficiently move 38-90 tonnes per hour depending on the auger size, grain type and other factors
- High performance recoil or electric Kohler motors
- Smooth running and reversible gearbox
- Safe operating guarded belt drive
- Low maintenance painted tube and legs
- Durable tyres with 14" HQ rims
- Supplied with quality steel hoppers with mesh tops
- Designed and engineered for Australian conditions



**Call Bosmac today! 1800 096 673**

Our friendly staff can advise you on the best auger for your purposes

## About Bosmac

Bosmac is a family-owned business based in Parkes, NSW, in the heart of the grain belt.

Since 1981, Bosmac has been designing, engineering and manufacturing quality products for Australian conditions.

Bosmac is proud of its reputation for providing quality, reliable products at competitive prices along with personalised service.



### Optional Extras

- Auger Mate jockey wheel for taking the strain out of positioning your auger
- Flexible spout


Bosmac manufactures auger systems and roller mills to complement its grain augers.

### Standard Grain Auger Sizes (Custom sizes manufactured on request.)

Barrel Diameter	Auger Size		Auger Height at 35 Degrees		Recommended Motor Size	Capacity (Wheat)
	Metres	Feet	Metres	Feet		
150mm (6 inch)	12.2m	40ft	7.00m	22.94ft	12 HP	38 tonnes per hour
200mm (8 inch)	10.7m	35ft	6.14m	20.08ft	15 HP	60 tonnes per hour
200mm (8 inch)	12.2m	40ft	7.00m	22.94ft	15 HP	60 tonnes per hour
200mm (8 inch)	13.7m	45ft	7.80m	25.62ft	15 HP	60 tonnes per hour
200mm (8 inch)	15.2m	50ft	8.72m	28.68ft	20 HP	60 tonnes per hour
230mm (9 inch)	12.2m	40ft	7.00m	22.94ft	20 HP	90 tonnes per hour
230mm (9 inch)	13.7m	45ft	7.80m	25.62ft	22 HP	90 tonnes per hour
230mm (9 inch)	15.2m	50ft	8.72m	28.68ft	25 HP	90 tonnes per hour
230mm (9 inch)	16.8m	55ft	9.64m	31.55ft	25 HP	90 tonnes per hour
230mm (9 inch)	18.3m	60ft	10.50m	34.41ft	25 HP	90 tonnes per hour

**Note:** Capacity will vary according to the size, weight, moisture content and type of grain, the speed and angle of the auger, the clearance between the flight and tube, and available power.

Bosmac recommends operating its augers at a lower speed than most competitors. This will limit the augers' capacity but will extend the life of the equipment.

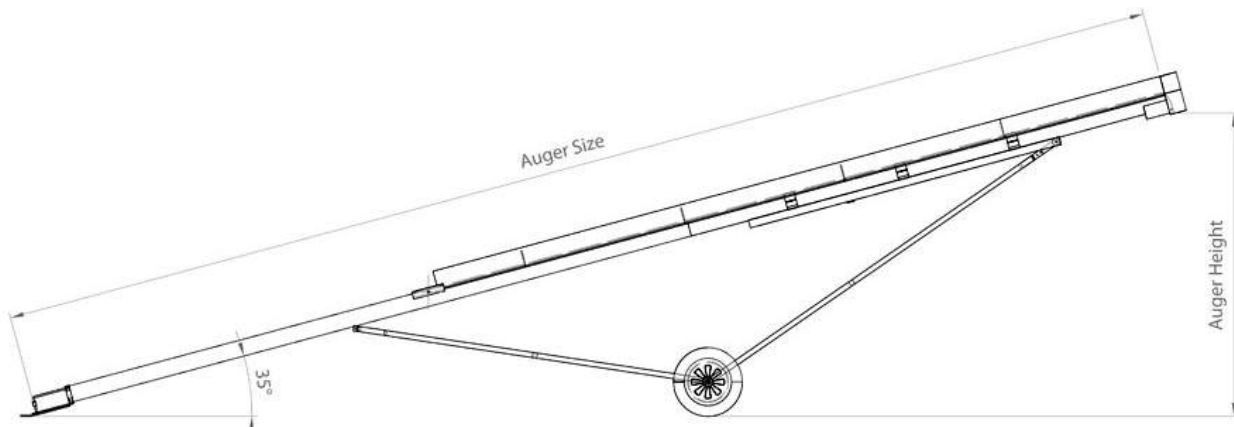

**Bosmac Pty Ltd**  
 ACN 002 109 524  
 64 Station Street  
 Parkes NSW 2870  
 Australia

Phone: +61 (2) 6862 3699  
 Toll Free: 1800 096 673  
 Web: [bosmac.com.au](http://bosmac.com.au)  
 Email: [sales@bosmac.com.au](mailto:sales@bosmac.com.au)